



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Sony Xperia L Handset

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Professional small
torx 4 screwdriver

0,66 €



Opening tool
Smartphone, tablet

2,19 €



Terminal opening
tool, plastic

0,71 €



12.98 x 6.01 x 2.05
mm generic earpiece
speaker

0,50 €

Step 1 - Battery cover

Remove the battery cover. Use a plastic tool to avoid scratching or damaging the case.





Step 2 - Battery

Remove the battery by pulling on the bottom.



Step 3

Remove the 6 Torx screws that hold the housing.



Step 4 - housing

Separate the intermediate housing. Use a plastic tool to avoid damaging or scratching the equipment.





Step 5 - Motherboard


Disconnect the flex cables and the coaxial cable that hold the motherboard.





Step 6

Take off the flex circuit that connects the digitizer.

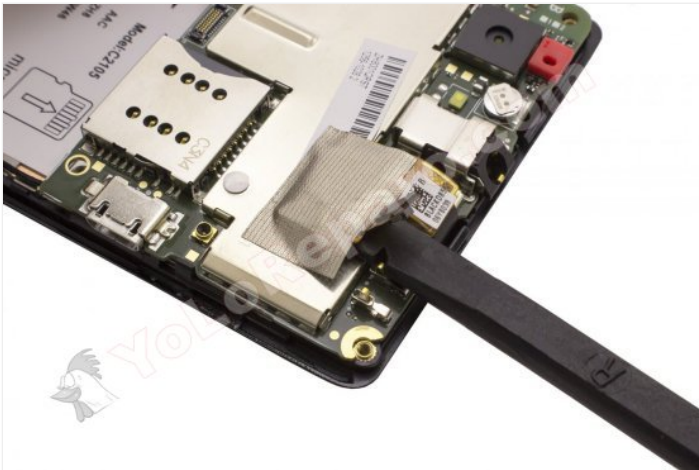

Step 7

Separate the base plate.



Step 8

To remove the headset, simply detach it from the case.

