



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy J7 (2016) Motherboard

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Set of 5 metal picks
for opening

3,09 €



BK-7275 (A Version)
5 in 1 screwdriver

6,41 €



Terminal opening
tool, plastic

0,71 €



Touch ESD glove, for
antistatic protection,
size M

4,16 €

Step 1 - Back case

We remove the back cover with the help of a plastic opening tool.






Step 2 - Battery

We extract the battery and the cards from the phone.



Step 3 - Intermediate housing

Remove the 18 Phillips screws (PH # 00) that hold the housing and with the help of a metal tine unhook the housing.

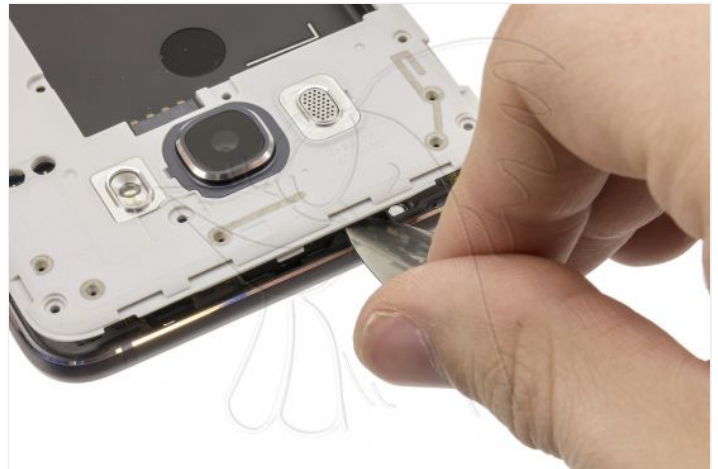

Step 4 - Frontal camera

We disconnected the front camera.



Step 5 - Motherboard

We disconnect the flex from the screen and the flex from the front buttons of the motherboard and remove it. Finally we will disconnect the rear camera to place it in the new plate that we are going to place.



