



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Huawei Y7 Handset

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Opening tool
Smartphone, tablet

2,19 €



Set with screwdriver
and 6 bits BST-8927B

8,82 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Antistatic and ESD
tactile glove, size S

5,30 €



Generic earpiece
speaker 15.02 x 6.05
x 2.55 mm

0,88 €

Step 1 - Remove back casing


The first step will be to remove the SIM / SD tray so that it does not prevent us from removing the casing. Then, with a flat tool, we will leverage the entire contour to disengage it.





Step 2 - Removing the motherboard

Remove the seven Phillips screws (PH # 00) that hold the plate and remove the shielding. We will also disconnect the components to disengage the motherboard.

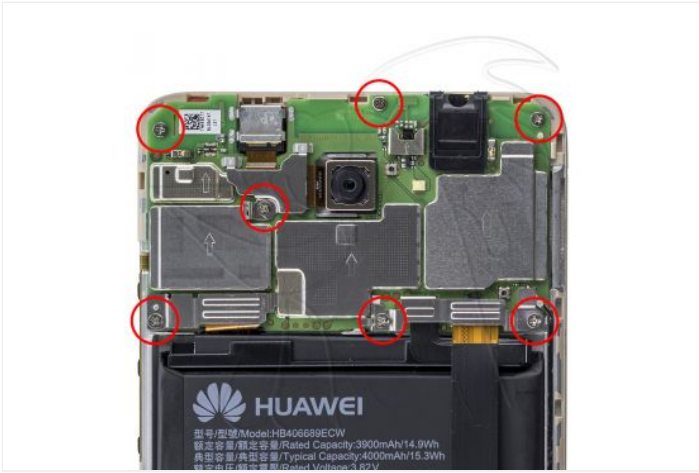



Step 3 - Handset

All that remains is to unstick and disengage the headset from the chassis.



