



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of ZTE Blade A910 Vibrator

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Double SMD
soldering station,
Baku 878

59,85 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Special SAT 0.75mm
high friction PVC pick

1,07 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €



Generic vibrator 7,98
x 2,79 x 10,03 mm
with cables

0,74 €

Step 1 - Back case


Take off the back cover using a plastic spike or a flat tool, if necessary we could apply a little heat with a hot air gun. Once we take off the back cover, we disconnect the flex from the fingerprint reader.





Step 2 - Antenna module with loudspeaker

We extract the ten Phillips screws (PH # 00) that hold the module, and with a flat tool we unhook it.

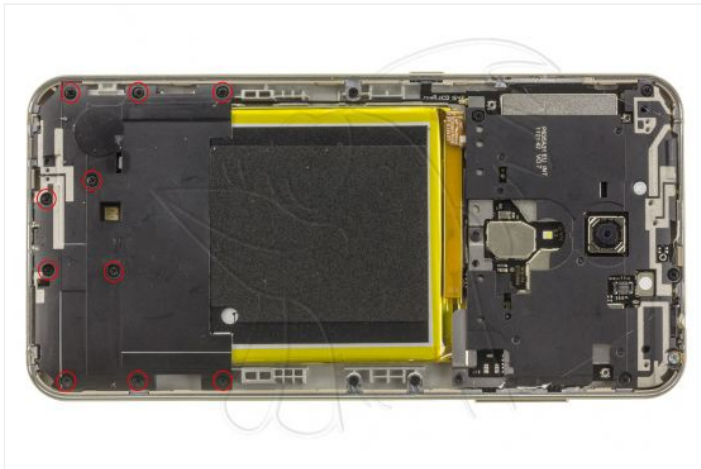

Step 3 - Vibrator

We take off with a pair of tweezers the damaged vibrator and we desoldamos it to put the new one in its place.



