



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Apple iPhone Xs Drums

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



616-00512 / 616-00514 generic battery for iPhone XS (A2097) - 2658 mAh /

12,94 €



Opening tool Smartphone, tablet

2,19 €



Pinza antiestática ESD redondeada

3,06 €



Stripper gun, hot air welder for repairs

15,59 €



Special SAT 0.75mm high friction PVC pick

1,07 €



Suction cup to separate screens in general

5,25 €



6-in-1 screwdriver, K-8107 with different heads, in blister

7,52 €

Step 1 - screen





We extract the two Pentalobe screws (TS1) apply a little heat with a hot air gun, and with the help of suction cups we will separate the screen from the chassis with the help of a pick as well.






Step 2 - Screen Flex

Remove the shield that is on top of the connectors, for this we must remove the three screws Triwing (Y0.6) and the Phillips screw (PH # 00) that holds the shield, and we can disconnect the flex from the screen and the headset module.

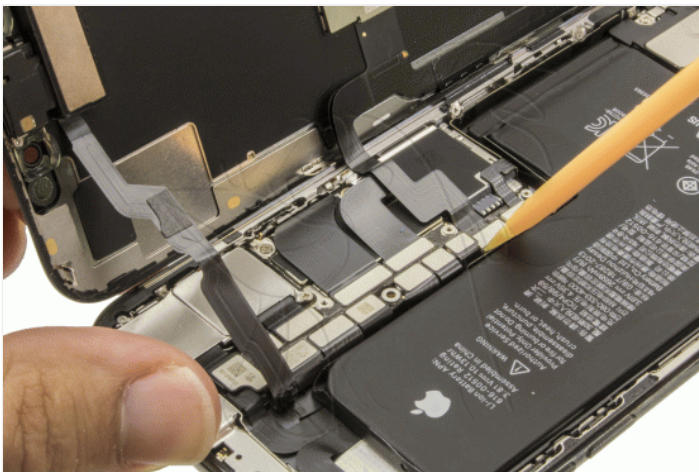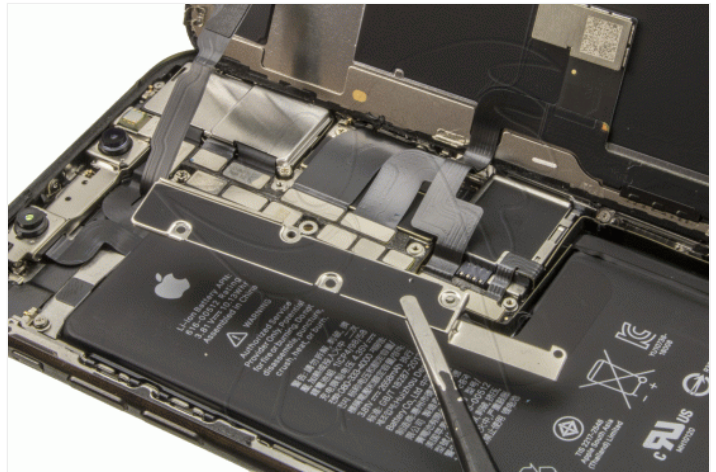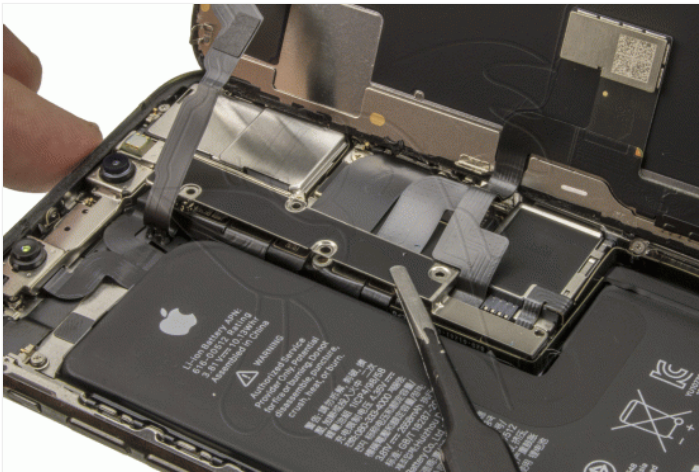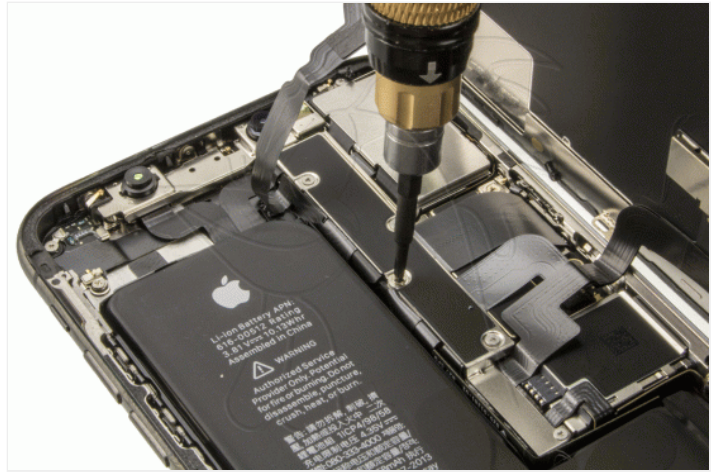

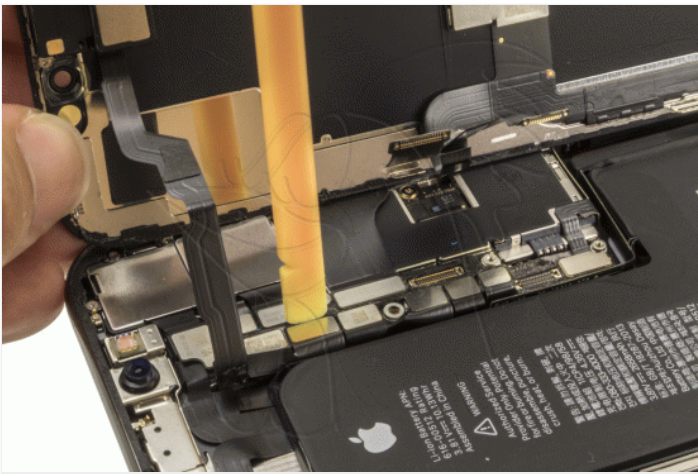

Step 3 - Bottom shields

We extract the four Phillips screws (PH # 00) and the Triwing screw (Y0.6) that hold the lower bindages that we need to remove.



Step 4 - Speaker

Remove the four Phillips screws (PH # 00) and the three standoff, disconnect the speaker connector and we can remove it.



Step 5 - Vibrator

We disconnect the flex from the vibrator and remove the vibrator.



Step 6 - Drums

We disconnected the battery, and we will take it off by using the adhesive strips that are underneath.

