



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy J4+ Frontal camera

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



5 mpx front camera
for Samsung Galaxy
J4 Plus, J415F

3,61 €



BK-7275 (A Version)
5 in 1 screwdriver

6,41 €



Professional
disassembly spatula
for mobile phones
and smartphones

2,71 €



Opening tool
Smartphone, tablet

2,19 €




PINZAS PUNTAS
CURVAS
PROFESIONAL

4,98 €

Step 1 - Opening



Heat the phone on the heating mat to soften the adhesive. With the metal flat opening tool separate the terminal screen.

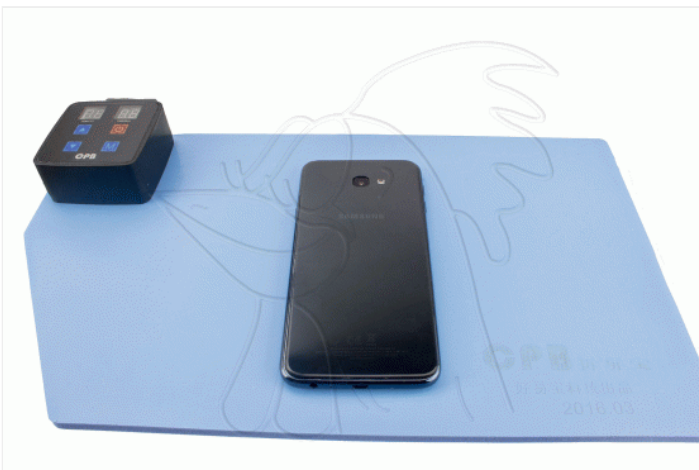



Step 2 - Extract screen

Remove the shielding from the connection with the clamps. With the opening tool release the connection and remove the screen.

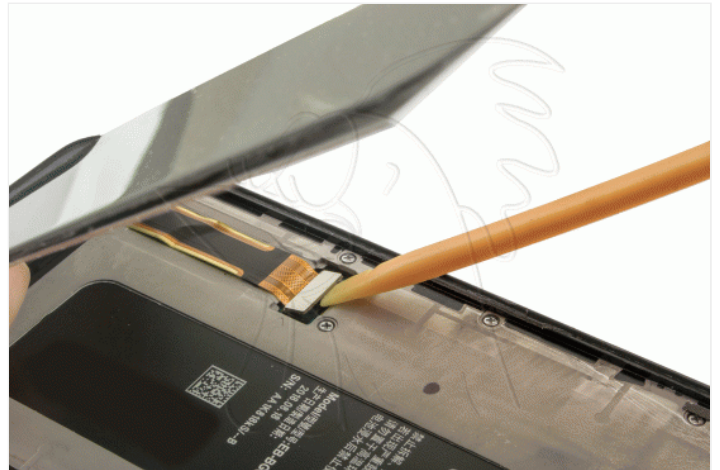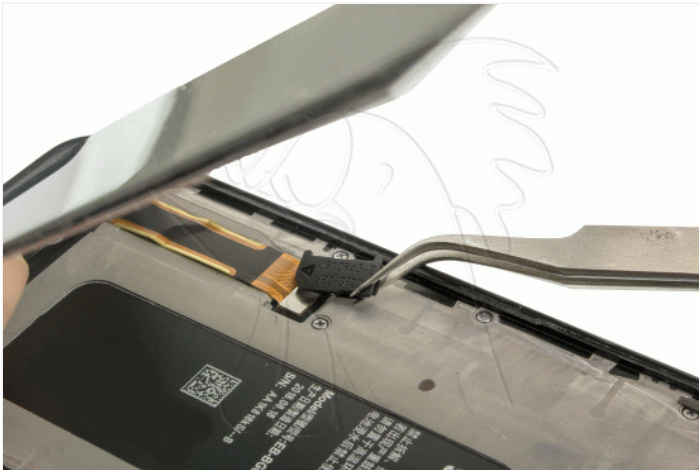

Step 3 - Remove intermediate housing

Remove the 18 Phillips screws (PH # 00) that hold the intermediate housing and separate it from the housing with the opening tool.



Step 4 - Remove front camera

With the opening tool release the connection of the camera and remove it.

