



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Meizu M6 Note Vibrator

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €




Generic vibrator
12,52 x 2,74 x 7,93
mm

1,25 €

Step 1 - Remove back cover

To remove the back cover, first remove the SIM / SD tray and remove the two Pentalobe screws (TS1). Then we unhook it by prying it with a flat tool.



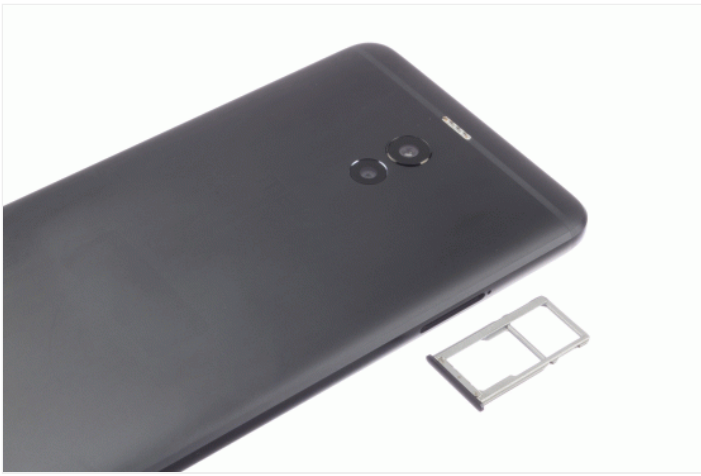


Step 2 - Remove speaker module

Remove the five Phillips screws (PH # 00) that hold the module and disengage it.



Step 3 - Remove auxiliary board

We disconnect the components of the auxiliary plate and detach it from the chassis.

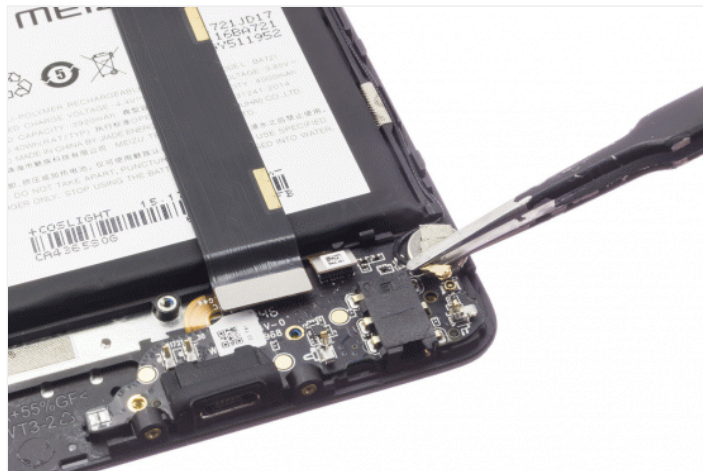

Step 4 - Vibrator

It only remains to take off the chassis vibrator.

