



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy A40 Frontal camera

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Front camera 25Mpx
for Samsung Galaxy
A40, SM-A405FN-DS
/ Samsung Galaxy

3,92 €



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



ESD-12 precision
antistatic tweezers
with fine tip

2,17 €



Special SAT 0.75mm
high friction PVC pick

1,07 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €

Step 1 - Tray

To begin with we have removed the card tray.



Step 2 - Back case

With the help of a tool that is thin enough we will open a hole to insert a plastic prong so as not to damage the back shell. If necessary we can apply some heat before introducing the first tool to soften the glue.



Step 3 - Fingerprint reader


With a pair of tweezers we will remove the plastic cover that covers the connector of the fingerprint reader, and with the help of a flat tool we will disconnect the fingerprint reader.





Step 4 - Intermediate housing


We extract the thirteen Phillips screws (PH # 00) that hold the intermediate housing and with the help of a plastic prong we will unhook it.

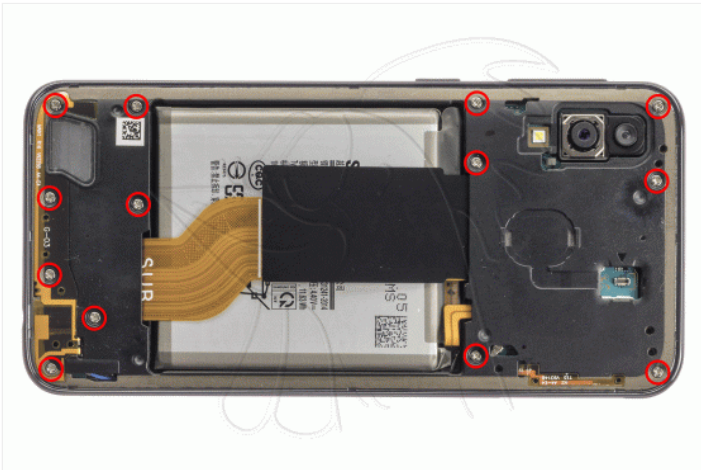



Step 5 - We disconnected battery

We disconnected the battery to work with greater security.

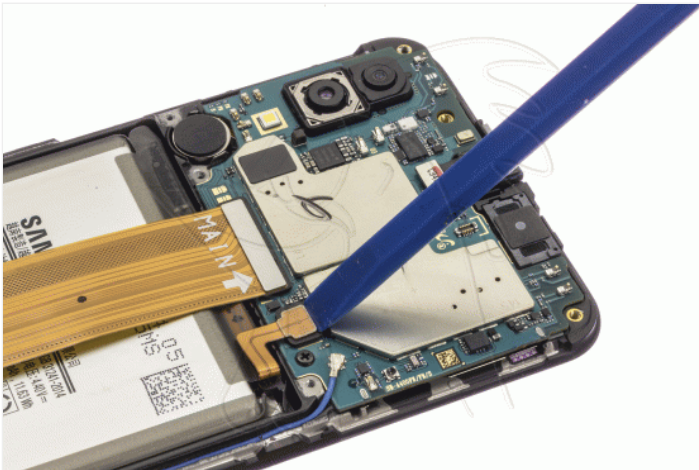

Step 6 - Frontal camera

We disconnect and remove the damaged front camera.

