



# NadieMeLlamaGallina.com

Porque Yo Lo Reparó

## Step by step tutorial: of Apple iPhone 12 Pro Rear cameras

For this tutorial you will need the following spared parts and tools that you cant get at our online store [Impextrom.com](http://Impextrom.com)  
Click on a tool for visit the website.



Rear camera 12 + 12  
+12 Mpx for Apple  
iPhone 12 Pro

86,27 €



Set of 5 metal picks  
for opening

3,09 €



Professional Tri-Wing  
Y 0,6 x 30mm  
screwdriver

2,89 €



Heat-opening thermal  
mat, CPB320

69,61 €



BK-7275 (A Version)  
5 in 1 screwdriver

6,41 €



Opening tool  
Smartphone, tablet

2,19 €



Suction cup for  
disassembling and  
repairing

0,51 €

### Step 1 - Screws

To begin we must remove the two Pentalobe screws (TS1) from the bottom of the phone.





## Step 2 - We apply heat






We apply heat to the screen for two minutes (approximately) at about 65°C, and with the help of a metal spike and a suction cup we will take off and unhook the screen.





### Step 3 - We disconnect the battery



We remove the two Triwing screws (Y0.6) that hold the shield, remove it, and with the help of a flat tool we will disconnect the battery to work with greater safety.

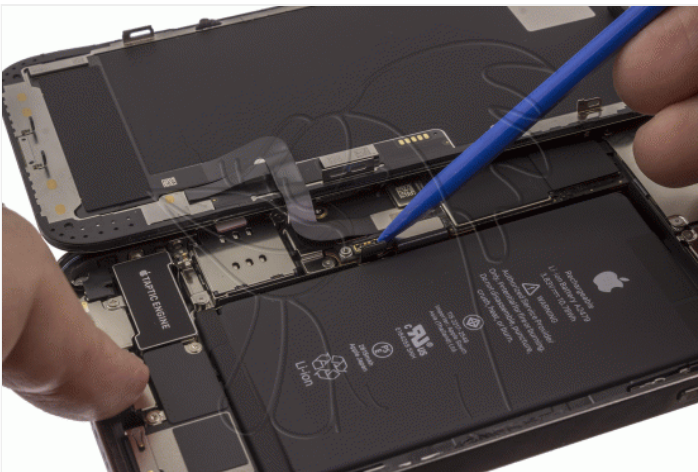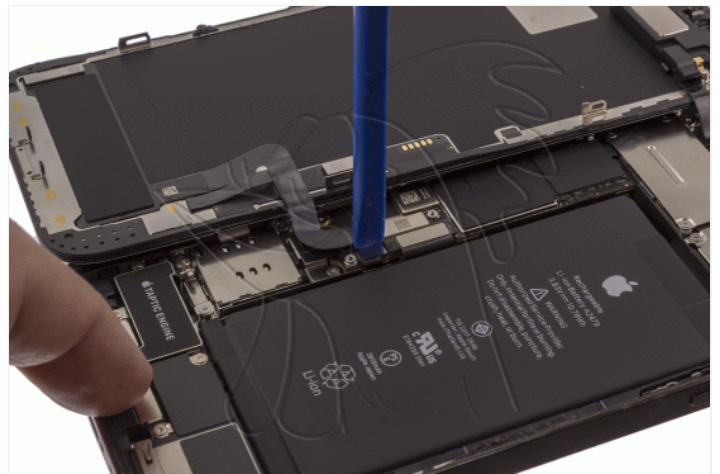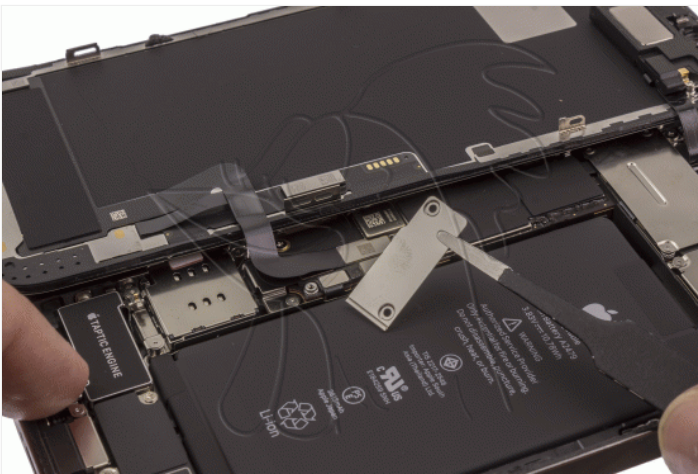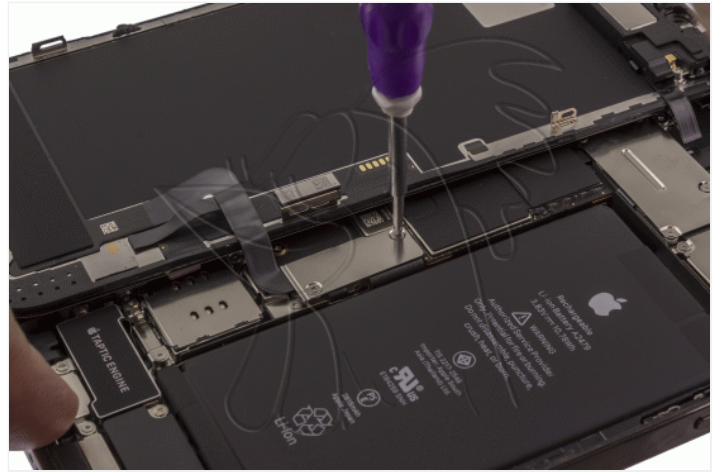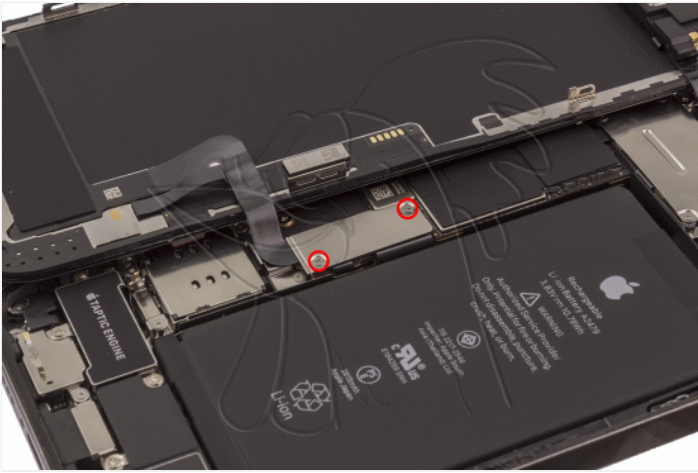




## Step 4 - Connectors

We extract the four Triwing screws (Y0.6) that hold the shield, and proceed to disconnect the connectors that connect the screen with the motherboard.

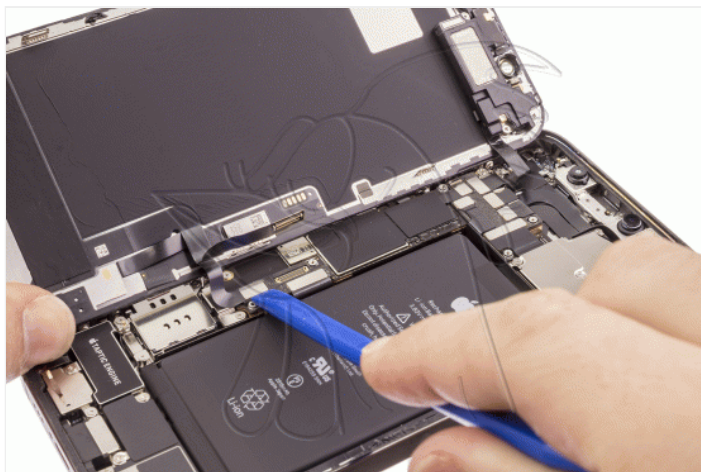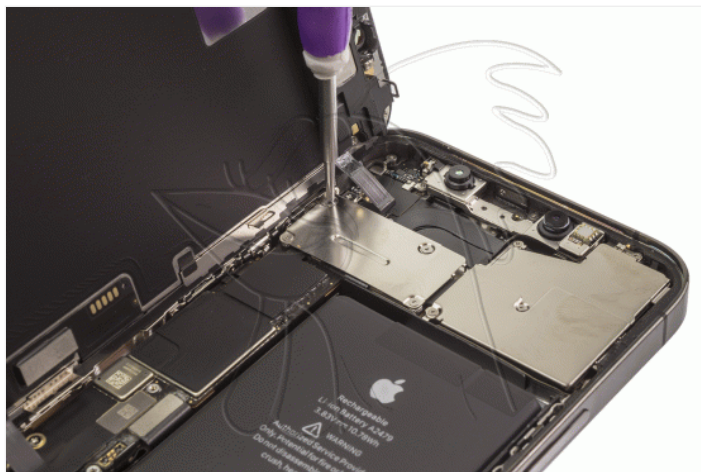



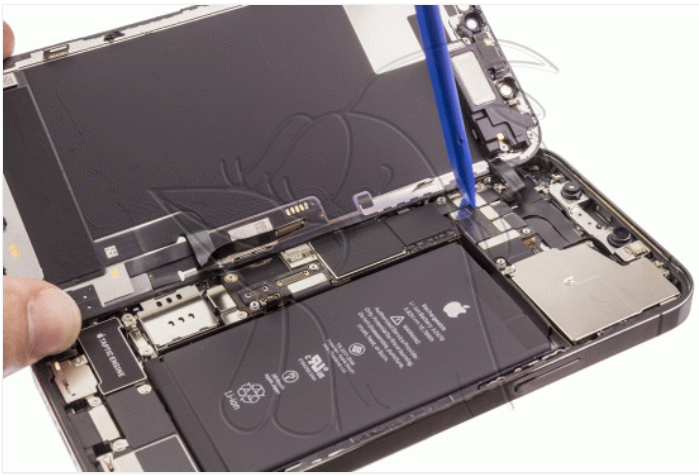

## Step 5 - Armor

We extract the four Triwing screws (Y0.6) that hold the shield that covers the cameras, and remove it.



## Step 6 - Rear cameras

We disconnect the two connectors of the damaged cameras, and with the help of a flat tool we will remove them and install the new ones in their place.

