



Step by step tutorial: of TCL Tab 10s right speaker

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Double SMD
soldering station,
Baku 878

59,85 €



Screwdriver BEST-
927B with 9 different
interchangeable bits

3,90 €



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Opening Tool for
tablets, smartphones,
laptops and other
devices

4,34 €



Set of 7 antistatic
precision tweezers

4,42 €



Right loudspeaker
ring tone for TCL Tab
10s, 9081X

2,81 €

Step 1 - Tray

Before starting we must remove the tray with the cards from the tablet that we are about to repair.







Step 2 - Back case

With the help of a plastic tool we will unhook all the edges of the back cover.






Step 3 - We disconnect battery

We remove the adhesive that gets in the way to carry out the following steps, and with a flat tip tool we will disconnect the battery in order to work with greater safety.

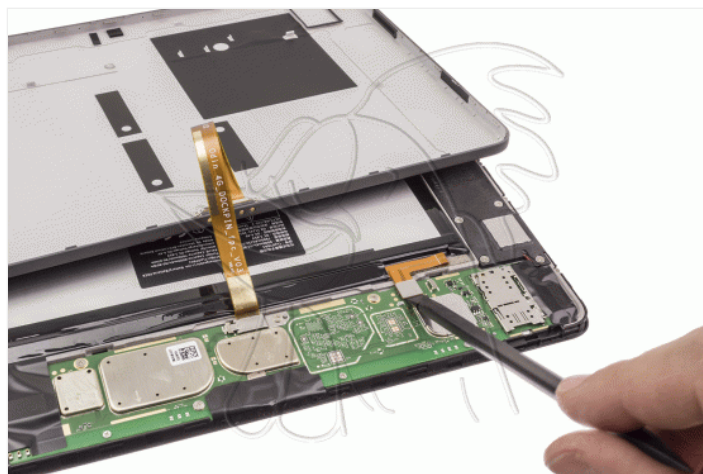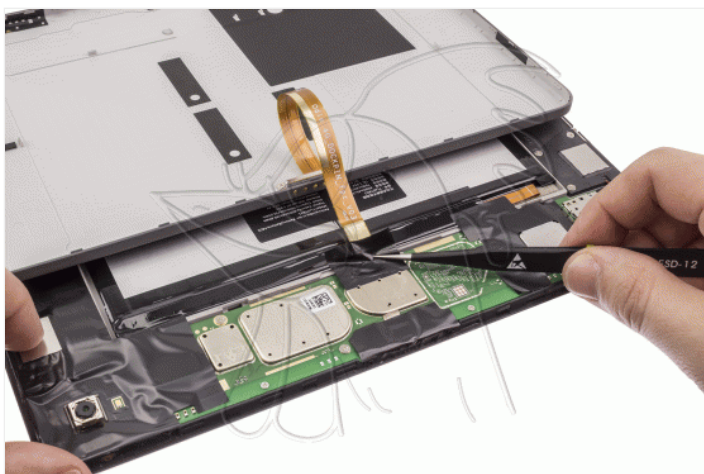

Step 4 - Flex with POGO connectors

We remove the Phillips screw (PH # 00) that holds the shield that covers the flex connector, and with a flat tool we will disconnect the flex with POGO connectors, and thus we can remove the back cover and work more comfortably.

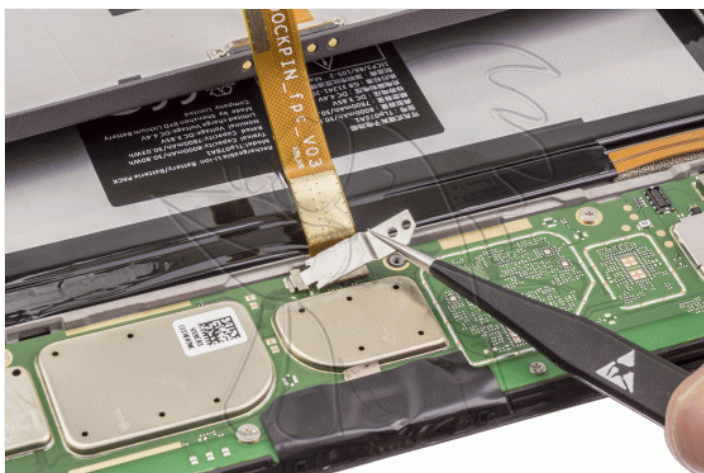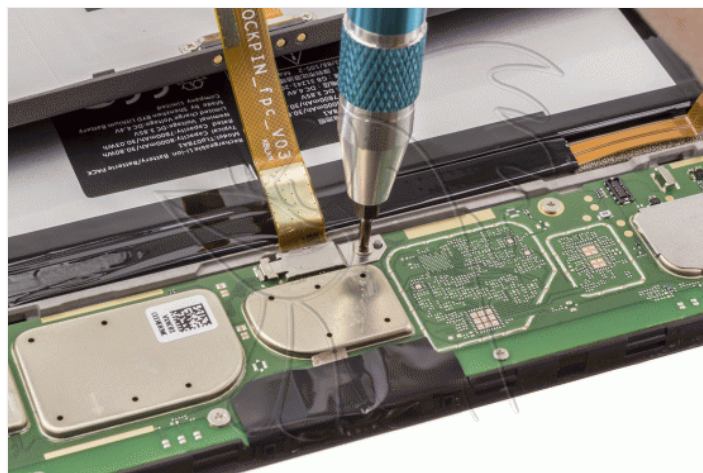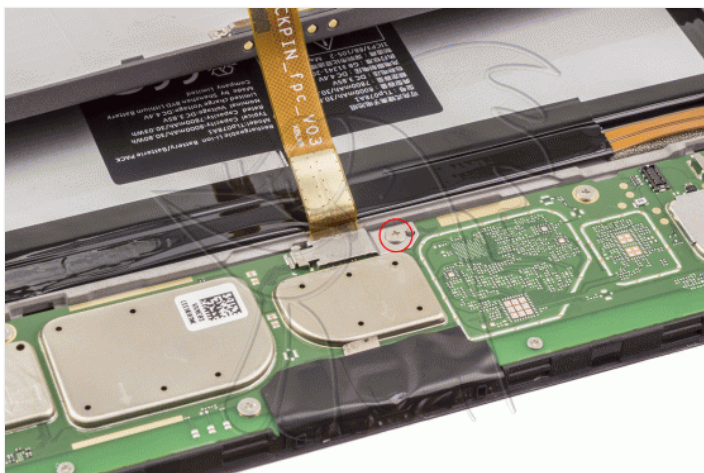

Step 5 - right speaker

We take off the adhesive that is above the speaker connectors, we extract the six Phillips screws (PH # 00) that hold it to the chassis, we lift it with the help of a flat tool, and we will be able to desolder the damaged speaker that we are going to replace.

