



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of LG G Flex 2 Rear camera

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Camera back of
13Mpx LG G3, D855,
LG G Flex 2, H955

1,85 €



Professional
disassembly spatula
for mobile phones
and smartphones

2,71 €



Opening tool
Smartphone, tablet

2,19 €



Kit of tools
profesional 70 in 1 -
ARTICLE NUMBER:
LSP031634

16,67 €



Anti-static tweezer
tips VETUS ESD-242

3,59 €



Terminal opening
tool, plastic

0,71 €

Step 1 - LG G Flex 2

Specifications

Screen: 5.5-inch P-OLED 1920x1080 pixels (403 ppi)

SoC: Qualcomm Snapdragon 810 64 bits and 8 big.LITTLE cores of 4 Cortex-A53 at 1.5 GHz and 4 Cortex-A57 at 2.0 GHz.

RAM: 2 GB LPDDR4

Camera Rear: 13 Mpx. with laser autofocus

Frontal camera : 1.2 Mpx.

Storage: 16 and 32 GB (+ microSD up to 2 TB)

Others: Bluetooth 4.1, LTE, WiFi ac, NFC

Battery: 3,000 mAh.

Dimensions: 149.1x75.3x7.1-9.4 millimeters

Weight: 152 grams

OS: Android 5.0 'Lollipop'

Before you start, make sure your mobile is turned off.



Step 2 - Back cover

To begin with we will remove the back cover. For this we will use an opening tool and sliding it between it and the intermediate housing, we will unhook it from the notches that hold it.



Step 3 - Intermediate housing

Remove the 13 Phillips screws that hold the middle housing.



Step 4

Use the metal spatula to disengage the lower module.

Separate the lower module from the rest of the housing.





Step 5

Separate the rest of the intermediate casing.





Step 6 - Motherboard connections

Disconnect the upper ends of the antenna coaxial cables.





Step 7

Unplug the lower flex and the battery connector.



Step 8


Disconnect the cameras from the motherboard.



Step 9 - Motherboard

Remove the motherboard to access the components.

We advise you to use finger condoms when holding the motherboard. This will prevent damage from electrostatic discharges.

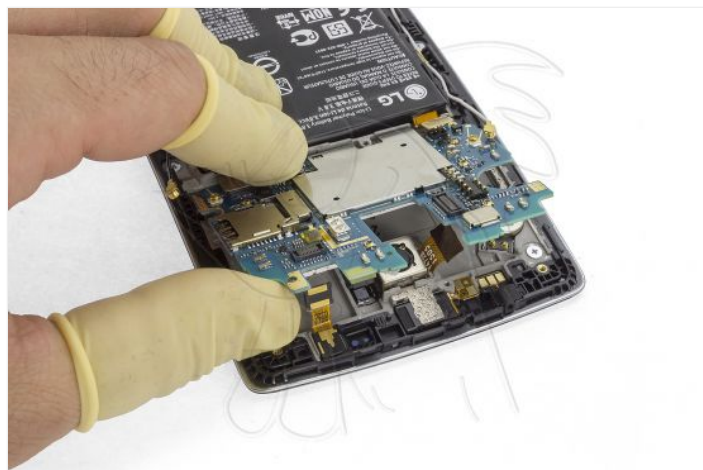



Step 10 - Rear camera

Finally, take off the rear camera by pulling gently.

