



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Huawei P9 Motherboard

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Pentalobe
screwdriver 0.8 for
iPhone devices

1,88 €



Screwdriver with 8
heads Peng Fa 7339A

6,96 €



Opening tool
Smartphone, tablet

2,19 €



Suction cup to
separate screens in
general

5,25 €



Touch ESD glove, for
antistatic protection,
size M

4,16 €

Step 1 - Remove SIM / SD tray

To remove the case, we will remove the two pentalobe screws that are on the bottom of the phone.

We will also have to remove the tray of SIM and SD cards.



nadiemellamagallina.com



nadiemellamagallina.com



nadiemellamagallina.com



nadiemellamagallina.com



Step 2 - Remove back casing

To separate the chassis housing, we will pull both sides. It is recommended to use the indicated tool to avoid breaking the flex of the fingerprint sensor.





Step 3 - Disconnect components

In this step we disconnect the components connected to the motherboard.





Step 4 - Handset

To remove the base plate, we will remove the screws that still hold it and disengage it.





nadiemellamagallina.com

Step 5 - Motherboard

It only remains to disconnect the cameras from the motherboard.



nadiemellamagallina.com



nadiemellamagallina.com



nadiemellamagallina.com




nadiemellamagallina.com




nadiemellamagallina.com



nadiemellamagallina.com

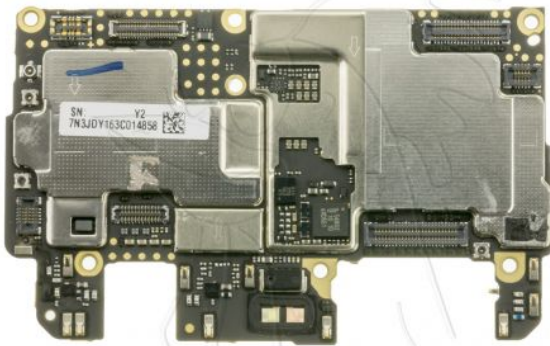

nadiemellamagallina.com

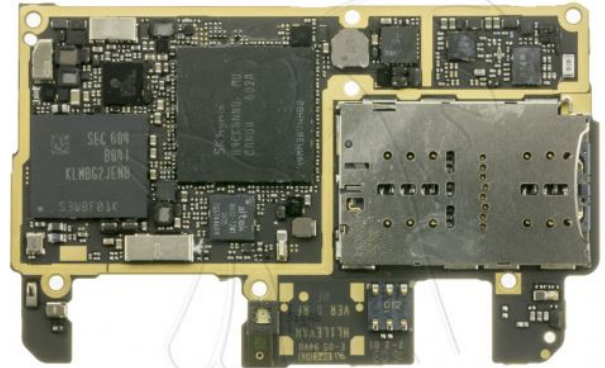

nadiemellamagallina.com