



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Nokia 7.1 Auxiliary plate

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €



PREMIUM quality
auxiliary board with
USB Type-C
charging, data and

3,91 €

Step 1 - SIM tray

With a SIM removal tool we remove the tray.





Step 2 - Back case

Heat the terminal at 80° for 1 minute.






With an opening tool we are taking off the entire back shell making the outline.



Step 3 - Intermediate housing



Unscrew the Phillips screws (PH # 00) that hold the intermediate housing. We remove it.

We disconnect the flex from the fingerprint reader to be able to completely remove the back cover.

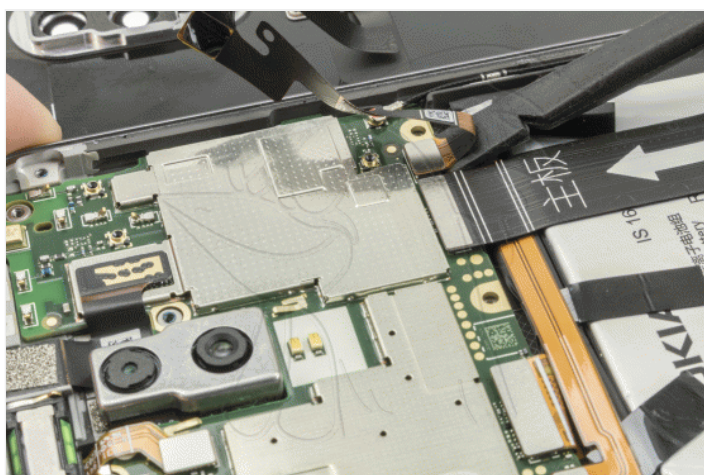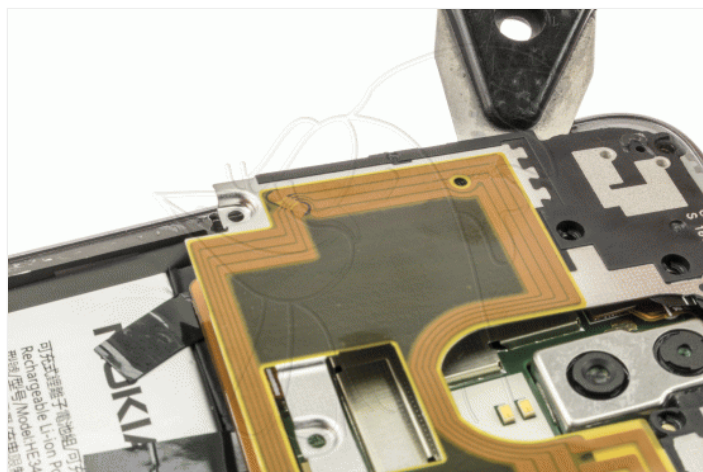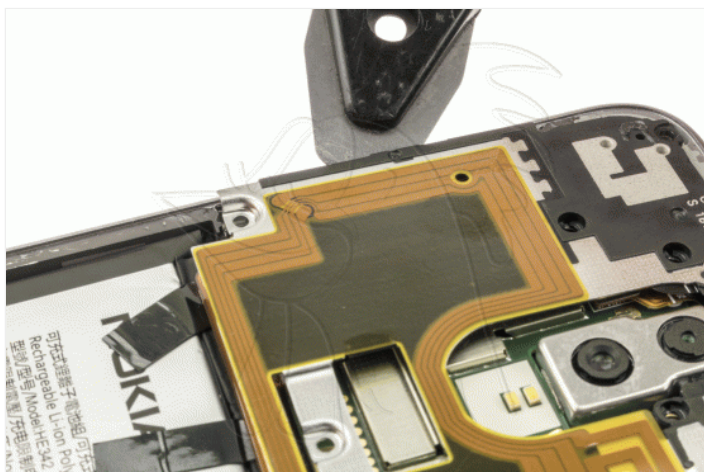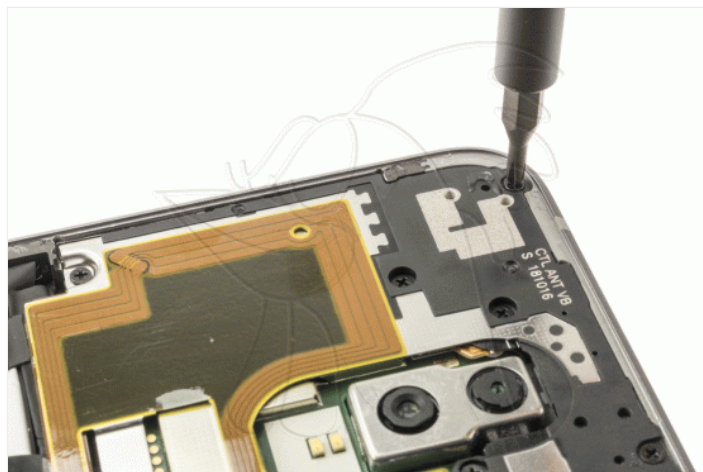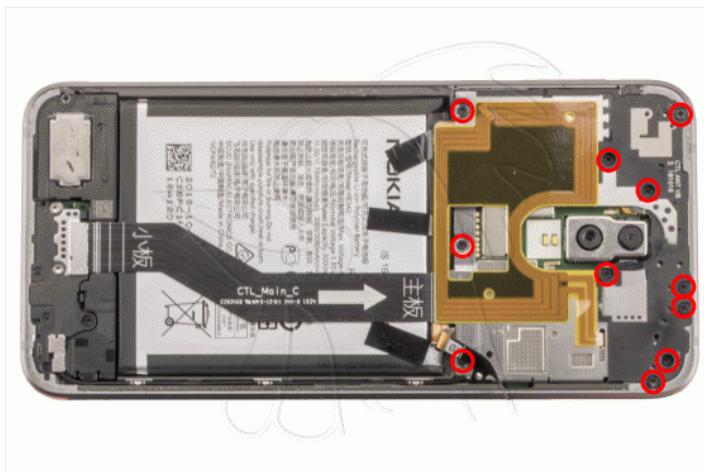

Step 4 - Bottom antenna

Unscrew the three Phillips screws (PH # 00) and the two Torx screws (T.5) and remove the lower antenna module.

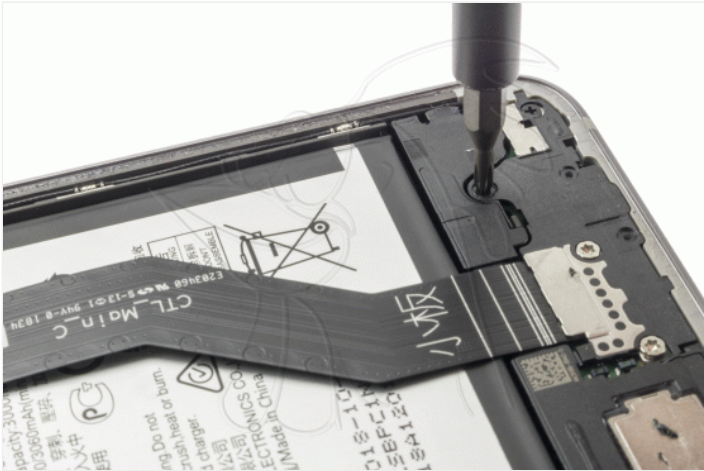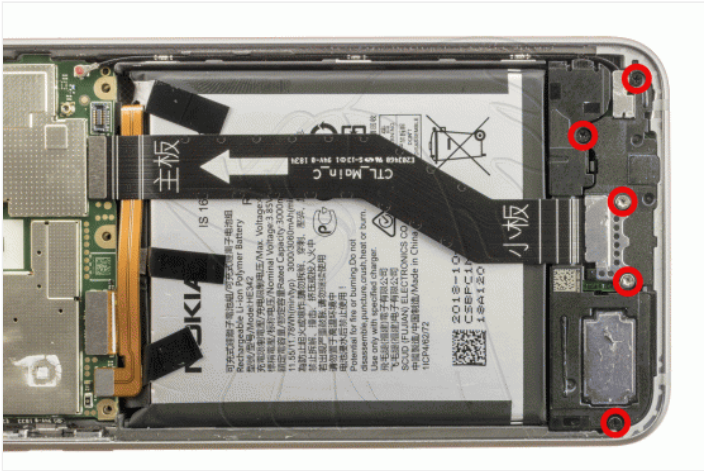

Step 5 - Auxiliary plate

We disconnected the interconnection flex and the coaxial cable.

We remove the auxiliary plate.



