



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Xiaomi Mi 9T Fingerprint reader

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Heat-opening thermal mat, CPB320

69,61 €



Opening tool Smartphone, tablet

2,19 €



Special SAT 0.70mm PET pick, high friction and resistance

1,25 €



PREMIUM screwdriver with 24 magnetic replacement bits

10,41 €



Fingerprint for Xiaomi Mi 9T, Redmi K20, Xiaomi Mi 9T Pro (M1903F11G)

4,40 €

Step 1 - Back case


To start, we must apply heat to the back cover, and with the help of a thin tool we will open some space to introduce one or more plastic spikes, with which it will be less risky to remove the case.






Step 2 - Intermediate housing

We remove the twelve Phillips screws (PH # 00) that secure the intermediate housing with the NFC antenna.

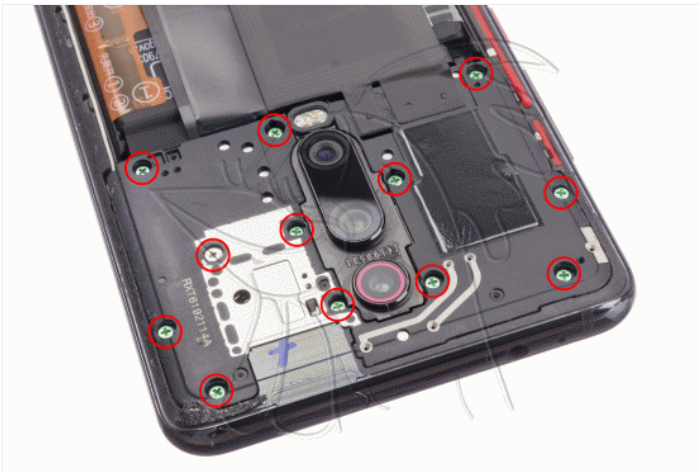

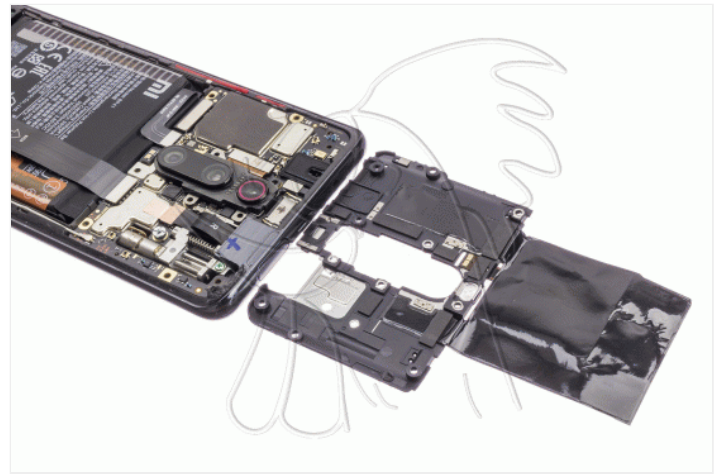

Step 3 - We disconnect battery

We disconnect the battery.



Step 4 - Speaker


We remove the eight Phillips screws (PH # 00) that hold the speaker, and with the help of a flat tool we will unhook it.





Step 5 - Components

We disconnect and remove all the components that hinder us to remove the auxiliary plate.

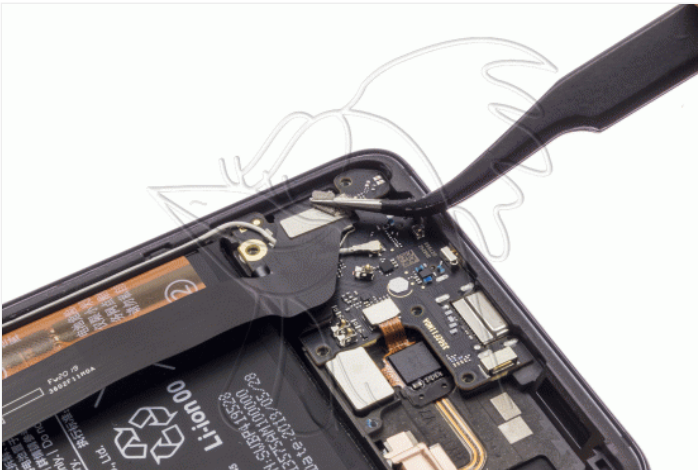



Step 6 - Auxiliary board

We unhook the auxiliary plate.



Step 7 - Fingerprint reader

Finally, we only have to take off the flex with the fingerprint reader.

