



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Honor 8X Antenna module with loudspeaker

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Heat-opening thermal mat, CPB320

69,61 €



SIM card removal tool for all brands

1,61 €



Opening tool Smartphone, tablet

2,19 €



Pinza antiestática ESD redondeada

3,06 €



Set of professional tools for opening smartphones and tablets

18,97 €



Special SAT 0.75mm high friction PVC pick

1,07 €



6-in-1 screwdriver, K-8107 with different heads, in blister

7,52 €

Step 1 - SIM tray

With a SIM removal tool we remove the tray.





Step 2 - Back case

We apply heat for one minute at 80 degrees. We introduce a spike and perform all the contour taking off the back cover taking care not to break it.







Step 3 - Intercarsaca

Unscrew the Philips screws (PH # 00) to release the intermediate housing.

With a prong we perform the contour to detach the intermediate casing.

We disconnect the flex from the fingerprint reader on the motherboard.

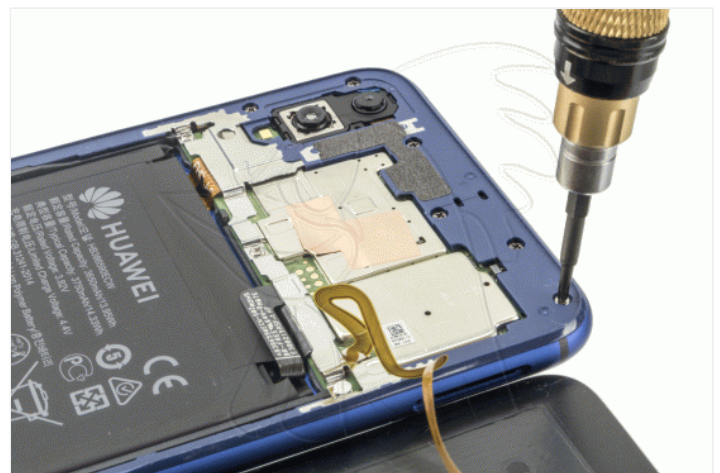

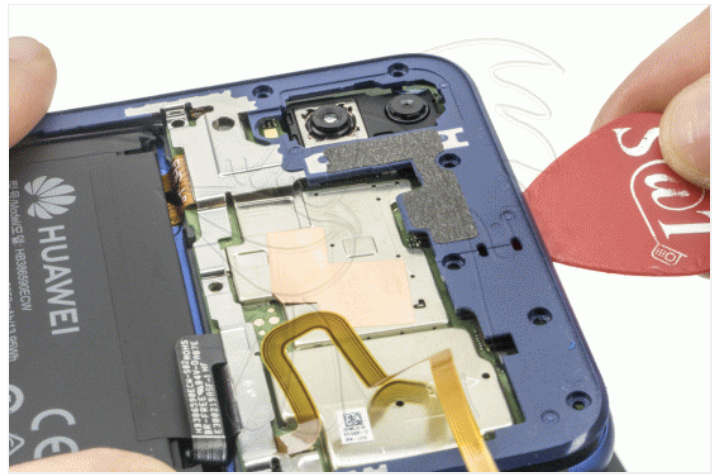

Step 4 - Antenna module with loudspeaker

We removed the antenna module with loudspeaker.



